


**BLOCKS**
**ČSN 25 5533**

With Four V-cuts

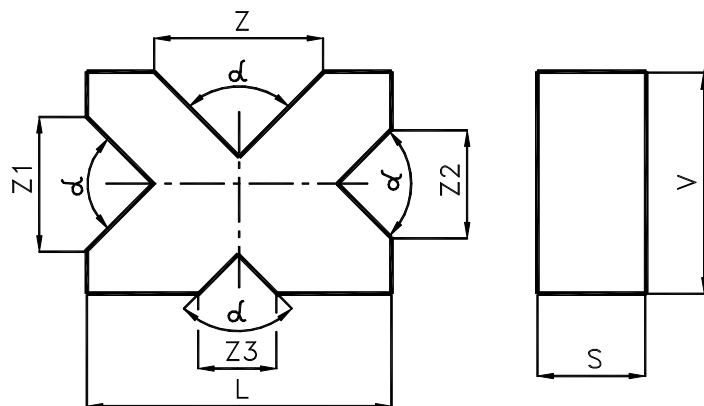

The blocks with parallelism tolerance of opposite sides of 0.03/100 mm and tolerance of right angles according to formula  $u = 0.02 + T/10000$ , where  $T$  = length of angle long arm in mm. The blocks are dispatched in pairs, case-hardened to 50-55 HRC. In a special version, blocks of dimensions at the option of the customer are available, including the cut angle.

O	L	S	V	Z	Z1	Z2	Z3	$\alpha$	G
70	70	18	48	40	24	16	10	90	0.9
130	130	50	110	70	50	30	16		7.2
200	200	80	170	110	70	50	30		28

Dimensions in mm.

Legend:

O ... block marking

 $\alpha$  ... cut angle [°]

G ... weight [kg]